

# AXIS 10" PUBLIC VIEW MONITOR

Wren PVMs offer a powerful deterrent and deliver top-notch video quality for forensic purposes, making them a smart investment that perfectly aligns with your budget.



The PVM10-B-2086 is a small-format PVM featuring an ONVIF-compliant, 1080P IP camera as well as Power-over-Ethernet (PoE). This design allows for the PVM10-B-2086 to be integrated into a VMS system. Face-detection blocking and front-facing LEDs provide an awareness of the unit and increased deterrent value.

The PVM10-B-2086 is ideal for targeting specific product categories in retail stores to better deter theft at known trouble spots. The unit is easy to install with accessory mounts developed specifically for retail shelving and fixtures.



## FEATURES

- HD video provides exceptional viewing and forensic details
- Attention grabbing features deliver high-deterrent value
- Low voltage for simple and cost-effective deployments
- UL Listed and PoE or DC powered



## PROFESSIONAL SERVICES

- Expert support for location design and seamless implementation, ideal for large-scale deployments.
- Installation guides and specifications
- North America customer support



## ABOUT 3Si

- **53 years** of experience and specialized knowledge in the **Security field**
- **24/7 US-based support**
- **Long-term relationships** with the industry, built on **trust and satisfaction**
- Partnered with over **10,200 law enforcement agencies**
- Over **19,000 criminals** apprehended and **\$150M** in assets recovered

## OUR END-TO-END SOLUTION



Camera & Video  
Hardware

**WREN**  
BY **3Si**

+



GPS  
Tracking

**COVERT**  
BY **3Si**


+



Video Management  
Systems

**SURVEILL**  
BY **3Si**



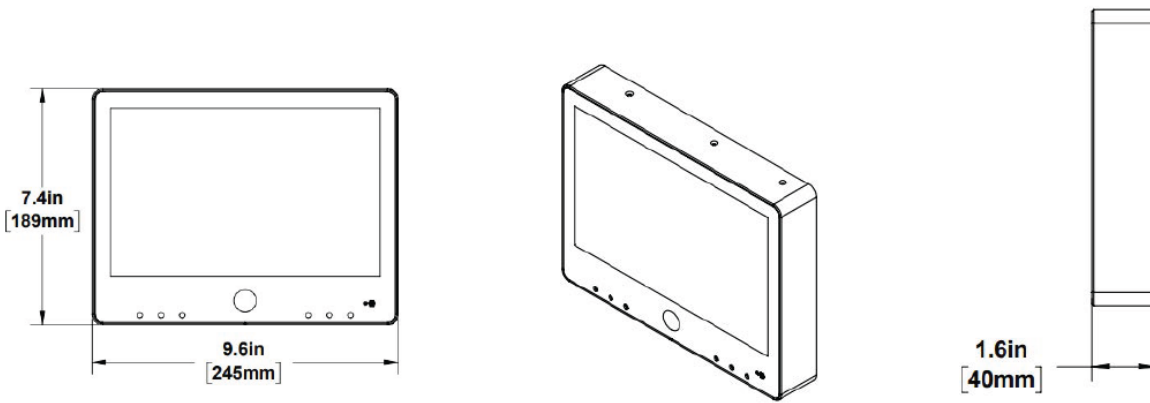

MODEL NUMBER	PVM10-1AFA51-W
<b>Mechanical</b>	
Housing Material	Steel
Color	White Housing, Black Screen
Product Dimensions	1.6" L X 9.6" W X 7.4" T
Mounting	VESA 75x75mm pattern
<b>Display</b>	
Size	10 in.
Type	LCD
Backlight	LED
Resolution	1280x800
Aspect Ratio	16:9
<b>Camera</b>	
Product	AXIS FA51 With FA1105
Resolution	1080p
Lens Type	Fixed
Lens Size	2.8mm
FoV (H)	111 degrees
<b>Connections</b>	
SD Card	micro SD OSD, Recording, Firmware, and LOGO Updates
Ethernet	RJ45 IP Camera, PoE
Digital I/O	Spring Terminal (2X)
CD Power Input	Terminal Block (2 position)
<b>Power</b>	
PoE	802.3af
DC	12VDC
<b>Environment</b>	
Operating Temperature	32°F - 104°F (0°C - 40°C)

71-0100-008  
Rev A 11/24

